


Large Size – Engineered Plastics

Select from these Engineered Plastics for Aggressive or Ultra-Pure Liquids

Each of these series offers unique features. Choose from this selection when all-plastic material is desirable and tank space is not restricted.

LS-30 Series – Polysulfone



For water-based liquids, with limited use in oils and chemicals. Cost is suited for high volume OEM use.

LS-74780 – All CPVC



Particularly well suited for rough service. Ideal for use in chemical and plating applications.


LS-1900PTFE



Resists build-up of foreign material or sticky media. Float travel remains uninhibited in viscous or corrosive liquids. SPDT switch.

LEVEL SWITCHES

Dimensions

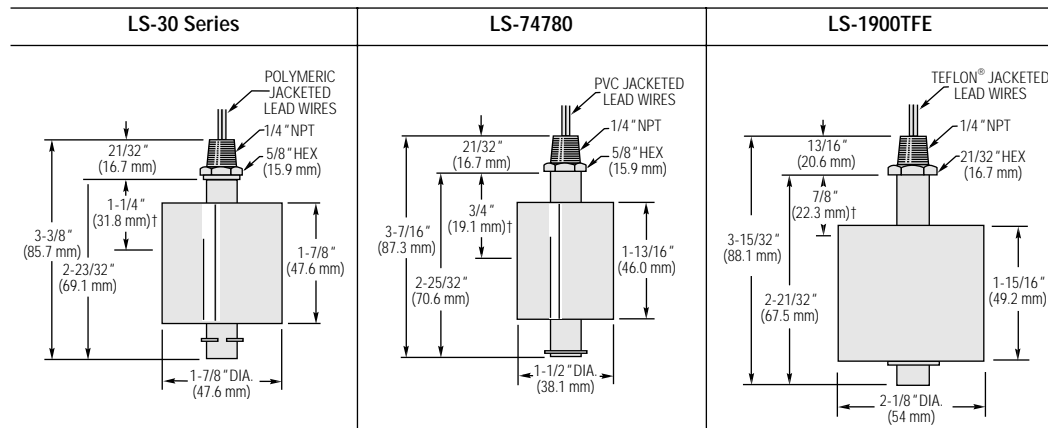

†L₁ = Switch actuation level, nominal (based on a liquid specific gravity of 1.0 and N.O. dry circuit—dimension will vary for N.C. circuit).

Common Specifications

Electrical Termination: No. 18 AWG, 24" L., Lead Wires (Jacket material is indicated on dimensional drawings, above).

Approvals: LS-30 Series switches are U.L. Recognized – File No. E45168.

How To Order – Select Part Number based on specifications required.

Series Number	Materials		Min. Liquid Sp. Gr.	Operating Temperature	Pressure, PSI, Max.	Switch*	Part Number	
	Stem, Mounting and Other Wetted	Float					Mounting Size	
							1/4" NPT	
LS-30	Polysulfone with 316 S.S. Retaining Clip		.55	-40°F to +225°F (-40°C to 107.2°C)	50	SPST, 20 VA	46201** ⚡	
							SPST, 100 VA††	46202** ⚡
							SPDT, 20 VA	46203 ⚡
LS-74780	CPVC		.85	-40°F to +180°F (-40°C to 82.2°C)	15	SPST, 20 VA	74780** ⚡	
LS-1900PTFE	Teflon®		.80	-40°F to +300°F (-40°C to 148.9°C)	30	SPDT, 20 VA	133299 ⚡	

* See "Electrical Data" on Page A-4 for more information.

** Switch operation is selectable, N.O. or N.C., by inverting the float on the unit stem. Units are shipped N.O. unless otherwise specified.

†† 100 VA switches are not U.L. Recognized.

⚡ – Stock Items.